


Under Voltage Relay

S1 UVR2

Features:

- * Suitable for 3ph-4wire system
- * Under Voltage Trip Level 75% of Monitoring Supply
- * Adjustable power on delay
- * 1 Changeover output contact
- * Width 17.5mm
- * Neutral fail detection

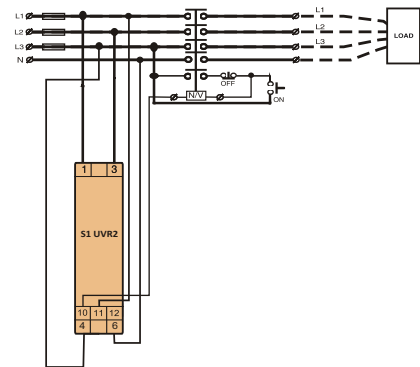

Specifications:

System supply voltage	415 VAC \pm 20%, (3Ph - 4 Wire)
Aux. supply	In – Built
Frequency	48Hz to 63Hz
Output Contacts	1 CO
Output Contact Ratings	5 Amps. @ 250 V AC (RESISTIVE)
UV Setting	75 % fixed of system supply
Resetting	Auto
Reset Delay	Instant
Reset Gap	3 %, \pm 1 % of 75%
Trip Time Delay SP/ UV	< 300ms Fixed (+/- 5 % + 10mS.)
Power On Delay	5 – 15 Min. (Variable in step of 2.5 Min.)
Setting accuracy UV setting On delay	\pm 2 % \pm 5 %
Indications ON UV / NF	Power ON (Green) , Under Voltage (Red) , Neutral fail (Fast UVLED blinking)
Enclosure Mounting Type	17.5mm DIN Rail S1 series
Dimensions (mm) (H x W x D)	89 X 17.5 X 59 mm (approx.)
Weight	Approx 73 gms.
Operating Conditions	Temperature -20° C to + 60° C Humidity upto 95% Rh.

Our Other Products: Phase Failure Relays, Monitoring Relays, Electronic Timers, Liquid Level Controllers, Power Line Transducers & Multifunction Meter, Automation Products, Alarm Annunciators, Soft Starters, AC Drives, PCB and Products for Agri Sector

Minilec (India) Pvt. Ltd.

S.No. 1073/1-2-3, At Post : Pirangoot, Tal : Mulshi, Dist : Pune (India), Pin : 412 111

Tel : +91 20 67920100 / 22922354-57. Fax : +91 20 22922134

Website : <http://www.minilecgroup.com>

E-Mail : mkt1@minilecgroup.com